


TKR-098-TOUCH-PANEL-WHITE-USB

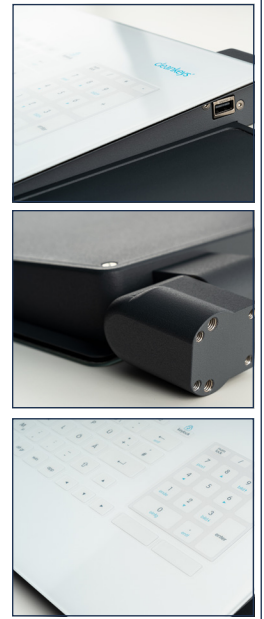

PRODUCT FEATURES

- Capacitive, foldable glass operation panel
- Keyboard with completely sealed glass surface
- Protection level IP65 (front side)
- Keylock during cleaning the keyboard
- Washable and disinfectable, so that it complies with high hygienic standards
- Compact keyboard layout with integrated touchpad
- Beep volume and sensitivity adjustable individually
- Various possibilities of individualisation (colours, layout, printing)
- USB socket for mouse or other peripherals

SPECIFICATION

Housing material:	Aluminium, powder-coated, RAL7011;
Number of keys:	98
Technology:	Capacitive keys with frontside haptic printing
Protection level:	IP65 (frontside)
Mounting type:	Panel, foldable, wall mounting
Material frontplate:	Thermally tempered glass
Glass thickness:	3 mm
Glass printing colour:	RAL9010
Weight:	3,6 kg
Dimensions:	640 x 280 x 35 mm (LBH)
Printing process:	Silk screen printing

Interfaces:	1 x USB for keyboard 1 x USB for USB socket
Other connections:	Ground cable
USB compatibility:	Compliant with USB 2.0
Operating temperature:	-0 °C to 60 °C
Storage temperature:	-40 °C to 65 °C
Operating systems:	Windows®, MacOSX®, Linux®
Certifications:	CE, FCC, EMC 60601-1-2 Ed4

TOUCHPAD SPECIFICATION

Operating principle:	capacitive
Dimensions:	76 x 90 mm

Order informationen


Art No	Product name	Layout
KR29203	TKR-098-TOUCH-PANEL-WHITE-USB-DE	German
KR30203	TKR-098-TOUCH-PANEL-WHITE-USB-US/EU	US / EU

Other layouts, configurations and interfaces on request.

* if operating system and hardware complies with the standards of USB-2.0-compatibility

Änderungen und Irrtümer vorbehalten!

TECHNICAL DRAWING

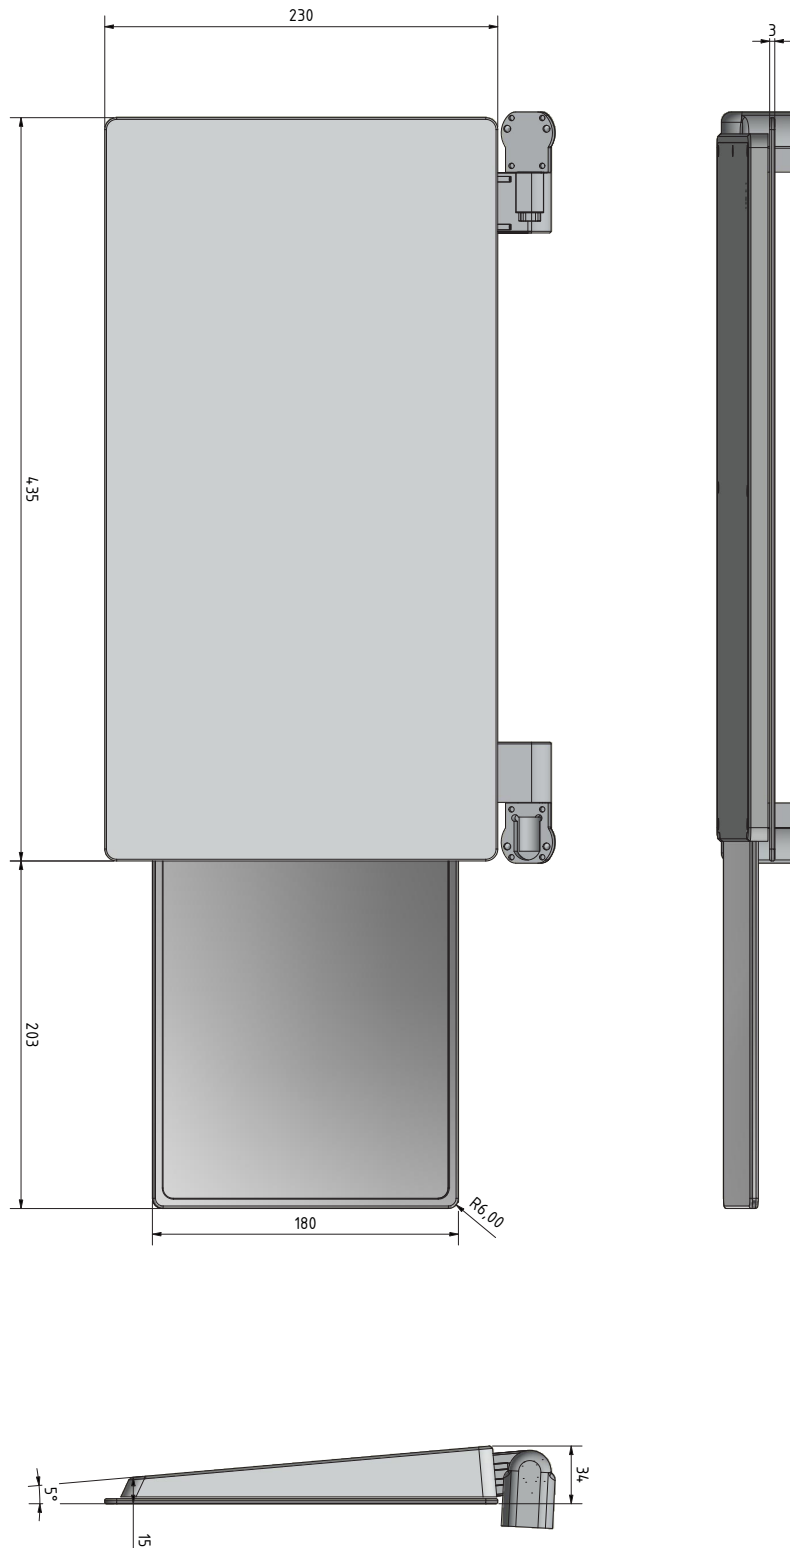

Änderungen und Irrtümer vorbehalten!

GETT Gerätetechnik GmbH

Mittlerer Ring 1 | 08233 Treuen | Germany
 Tel: +49 37468 660-0
 Fax: +49 37468 660-66
 E-Mail: info@gett.de
 Internet: www.gett.de


Gett North America LLC

E-Mail: info@gett-na.com
 Internet: www.gett-na.com

Gett Asia Ltd.

E-Mail: info@gett-asia.com
 Internet: www.gett-asia.com

TECHNICAL DRAWING

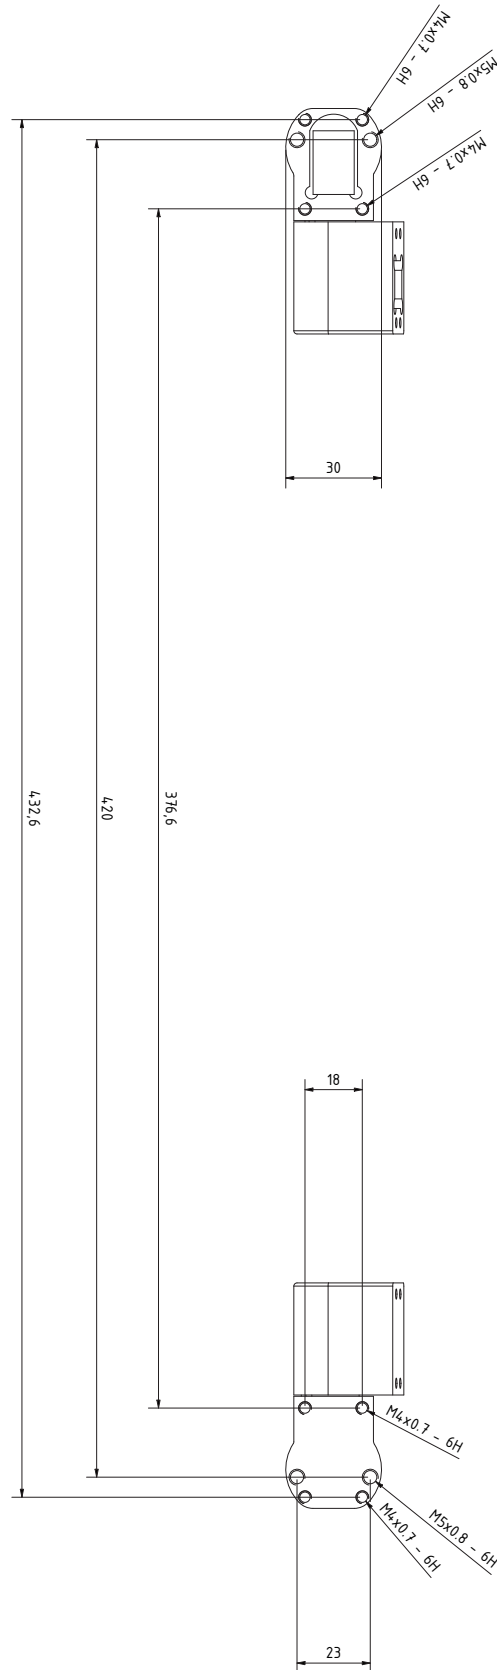

Änderungen und Irrtümer vorbehalten!

GETT Gerätetechnik GmbH

Mittlerer Ring 1 | 08233 Treuen | Germany
 Tel: +49 37468 660-0
 Fax: +49 37468 660-66
 E-Mail: info@gett.de
 Internet: www.gett.de


Gett North America LLC

E-Mail: info@gett-na.com
 Internet: www.gett-na.com

Gett Asia Ltd.

E-Mail: info@gett-asia.com
 Internet: www.gett-asia.com

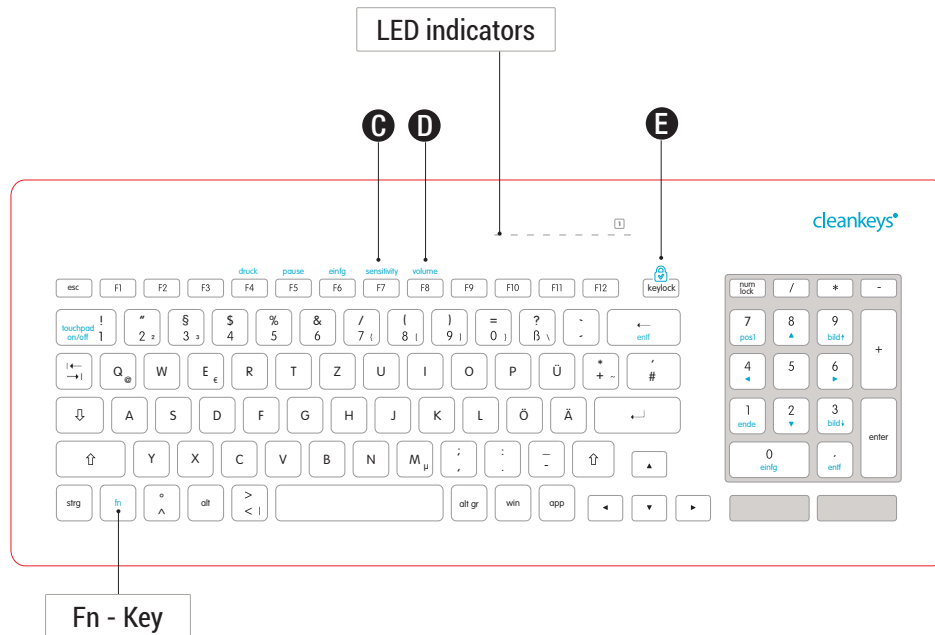

SPECIAL KEY FUNCTIONS



KeyLock **E**

To prevent unintentional key release while cleaning the keyboard, the CK5 keyboard has a key lock function.

- Activate KeyLock function:

Press and hold  +  until the row of LEDs stops flashing and lights up permanently. The activated KeyLock function is indicated by



- the green LED at the top left of the KeyLock key and



- the permanently lit row of LEDs



- Deactivate KeyLock function:

Keep  +  pressed until the row of LEDs stops flashing and goes out. If the KeyLock function is switched off, the green LED in the KeyLock button and the LED row are off.


SPECIAL KEY FUNCTIONS

Adjusting the sensitivity

The CK5 keyboard offers the possibility to adjust the touch sensitivity in 4 steps. The respective setting is displayed for a few seconds via the LED row. The sensitivity is set as follows:

Hold down  and press  repeatedly until the desired setting is reached.

The 4 levels are shown as follows:

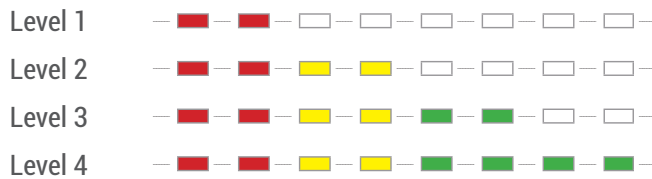

Adjusting the volume

The CK5 keyboard offers the possibility to adjust the beep volume in 4 steps. The respective setting is displayed for a few seconds via the LED row. The volume is set as follows:

Keep  pressed and press  repeatedly until the desired setting is reached.

The 4 levels are shown as follows:

